


NO AIR-GAP REQUIRED DURING INSTALLATION

Insultex House Wrap®

House Wrap and Insulation Wrapped Into One

What is Insultex House Wrap®?

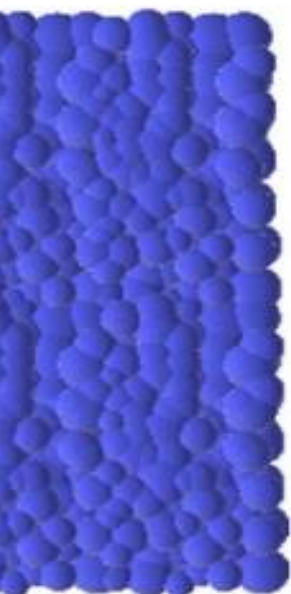

124 Cherry Street Pittsburgh,
PA 15223 United States

Phone: 412-799-0350

Email: [click here](#)



Info or Questions:

Warehouse address

124 Cherry Street
Pittsburgh, Pa 15223

***Please send all returns to our warehouse
address*

[Email Us](#)

Phone: 412-799-0350

Innovative Design, Inc.

[IVDN-Trading Symbol](#)

The R- value results represent the product sample itself. The referenced ¾" air gaps of the modified ASTM C518- 10 test method are not a contributing factor of the material's performance.

Innovative Designs Incorporated

All of our products contain Insultex®, The lightest and thinnest thermal insulation ever.

This new cellular structured fabric is truly revolutionary. It's proven that [air is the best Insulation](#) and Insultex® incorporates countless micro air cells. These individual pockets trap air and do not allow it to escape.





ICC-ES Evaluation Report

ESR-1108

Reissued December 2023


This report also contains:

-CBC Supplement

Subject to renewal December 2025

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2023 ICC Evaluation Service, LLC. All rights reserved.

<p>DIVISION: 07 00 00 - THERMAL AND MOISTURE PROTECTION</p> <p>Section: 07 25 00—Water-resistive Barriers/Weather Barriers</p> <p>Section: 07 27 00—Air Barriers</p>	<p>REPORT HOLDER: ANCI, INC.</p>	<p>EVALUATION SUBJECT: ALTA® HP, ALTA® Commercial, ALTA® LP And BARRICADE® DRAINAGE</p>	
---	--	---	---

Evaluation reports from ICC Evaluation Service® are the most preferred resource used by code officials to verify that new and innovative building products comply with code requirements. The evaluation reports provide information about what code requirements or acceptance criteria were used to evaluate the product, how the product should be installed to meet the requirements, how to identify the product, and much more. ES Reports are divided into eleven major areas.

1.0 EVALUATION SCOPE

Does not comply w/ WSEC

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 [International Building Code® \(IBC\)](#)
- 2021, 2018, 2015, 2012, 2009 and 2006 [International Residential Code® \(IRC\)](#)
- 2021, 2018, 2015, 2012, 2009 and 2006 [International Energy Conservation Code® \(IECC\)](#)
- 2013 *Abu Dhabi International Building Code (ADIBC)*[†]

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Property evaluated:

- Water resistance
- Surface-burning characteristics
- Air leakage
- Drainage

No evaluation for thermal resistance.

1.1 Evaluation to the following green code(s) and/or standards:

- 2022 [California Green Building Standards Code \(CALGreen\)](#), Title 24, Part 11
- 2021, 2018, 2015 and 2012 [International Green Construction Code® \(IgCC\)](#)
- 2020, 2017, 2014 and 2011 ANSI/ASHRAE/USGBC/IES Standard 189.1—Standard for the Design of High-Performance Green Buildings, Except Low-Rise Residential Buildings
- 2020, 2015, 2012 and 2008 ICC 700 [National Green Building Standard™](#) (ICC 700-2020, ICC 700-2015, ICC 700-2012 and ICC 700-2008)

Attributes verified:

See Section 3.1



2.0 USES

INSULTEX is not listed as one of the products evaluated.

The products evaluated in this report (ALTA[®] HP, ALTA[®] Commercial, ALTA[®] LP, Barricade[®] Drainage) are used as water-resistive barriers on the exterior side of exterior walls of buildings of any construction type under the IBC and construction permitted under the IRC. Under the 2021, 2018, 2015 and 2012 IBC, the water-resistive barriers may be used on buildings of Types I, II, III or IV construction that are not greater than 40 feet (12.2 m) in height above grade plane in accordance with 2021 and 2018 IBC 1402.5 or 2015 and 2012 IBC Section 1403.5, except as permitted under Exceptions 1 and 2 of the 2021 and 2018 IBC Section 1402.5 and 2015 IBC Section 1403.5.

The products are equivalent to Grade D paper as described in 2012, 2009 and 2006 IBC Section 2510.6 and 2021, 2018 and 2015 IRC Section R703.7.3 (2012, 2009 and 2006 IRC Section R703.6.3).

The ALTA[®] HP and ALTA[®] Commercial comply as an ASTM E2556, Type I water-resistive barrier in accordance with 2021, 2018 and 2015 IBC Section 2510.6. The ALTA[®] LP and Barricade[®] Drainage comply as an ASTM E2556, Type II water-resistive barrier in accordance with 2021 IBC Section 2510.6 and with the exception to 2018 and 2015 IBC Section 2510.6.

The products may also be used as air barrier materials under IRC Section N1102.4.1 and 2021, 2018 and 2015 IECC Sections C402.5 and R402.4 [2012 IECC Sections C402.4 and R402.4 (2009 and 2006 IECC Sections 402.4 and 502.4)].

In addition, the products may be used as components of an EIFS drainage system as described in Section 4.4.

3.0 DESCRIPTION

3.1 General:

The products described in this report have a flame spread index of less than 25 and a smoke-developed index of less than 450, when tested in accordance with ASTM E84.

The products described in this report have a peak heat release rate of less than 150 kW/m², a total heat release rate of less than 20 MJ/m², and an effective heat of combustion of less than 18 MJ/kg as determined in accordance with ASTM E1354.

The products have an air leakage rate not exceeding 0.02 L/s-m² at 75 Pa [0.004 cfm/ft² at 0.3 inch w.g. (1.57 psf)] when used as an air barrier material under IRC Section N1102.4.1 and 2021, 2018 and 2015 IECC C402.5 and R402.4 [2012 IECC Section C402.4 and R402.4 (2009 and 2006 IECC Sections 402.4 or 502.4)].

The products are manufactured with ultraviolet stabilizing additives and are supplied in rolls and sheets of varying sizes.

The attributes of the water-resistive barrier have been verified as conforming to the requirements of (i) CALGreen Section 5.407.1 for water-resistive barriers; (ii) 2021 IgCC Section 701.3.1.2, 2018 IgCC Section 701.3.1.1, and 2015 and 2012 IgCC Section 605.1.2.1 for air barriers; (iii) 2020 ASHRAE 189.1 Section 7.3.1.2, 2017 and 2014 ASHRAE 189.1 Section 7.3.1.1, and 2011 ASHRAE 189.1 Section 7.4.2.9 for air barriers; (iv) ICC 700-2020 Sections 602.1.8, 11.602.1.8, 1202.6 and 13.104.1.4; ICC 700-2015 Sections 602.1.8, 11.602.1.8 and 12.6.602.1.8; ICC 700-2012 Sections 602.1.8, 11.602.1.8 and 12.5.602.1.8; and ICC 700-2008 Section 602.9 for water-resistive barriers. Note that decisions on compliance for those areas rest with the user of this report. The user is advised of the project-specific provisions that may be contingent upon meeting specific conditions, and the verification of those conditions is outside the scope of this report. These codes or standards often provide supplemental information as guidance.

3.2 ALTA[®] HP:

ALTA[®] HP consists of a polyethylene nonwoven CLAF[®] fabric laminated to a polyethylene microporous film.

3.3 ALTA[®] Commercial:

ALTA[®] Commercial consists of a nonwoven CLAF[®] fabric laminated to a polyethylene film.

3.4 ALTA[®] LP and Barricade[®] Drainage

ALTA[®] LP and Barricade[®] Drainage consist of a polyethylene nonwoven fabric laminated to a polyethylene microporous film.

4.0 DESIGN AND INSTALLATION

4.1 General:

The report holder's published installation instructions and this report must be strictly adhered to. If requested by the code official, a copy of this report must be available at the jobsite during installation.

4.2 Water-resistive Barrier:

When installed as water-resistive barriers, the products described in this report are installed after wall framing is completed. The roll is placed approximately 2 feet (610 mm) from the starting corner and fastened to the sheathing with corrosion-resistant staples, large-headed nails, or roofing nails spaced at a maximum of 16 inches (406 mm) on center; and is then unrolled around the building and fastened, as set forth in the manufacturer's published installation instructions, at top and bottom sill plates and at framing members. A minimum of 6 inches (152 mm) of overlap is required for vertical seams and 2 inches (50.8 mm) for horizontal seams, except where the report holder's installation instructions specify a greater overlap dimension.

When use is over wood-based sheathing in exterior plaster applications, two layers of the barrier must be applied over sheathing in accordance with 2012, 2009 and 2006 IBC Section 2510.6 or 2018 and 2015 IRC Section R703.7.3 (2012, 2009 and 2006 IRC Section R703.6.3), as applicable.

When use of ALTA HP and ALTA Commercial is over wood-based sheathing in exterior plaster applications under the 2018 and 2015 IBC, two layers of the products must be applied over the sheathing in accordance with 2018 and 2015 IBC Section 2510.

When use of ALTA LP and Barricade® Drainage is over wood-based sheathing in exterior plaster applications under the 2018 and 2015 IBC, one layer of the products is applied over sheathing with the additional requirements noted under Exception 1 of 2018 and 2015 IBC Section 2510.6.

When use of ALTA HP and ALTA Commercial is over wood-based sheathing in exterior plaster applications under the 2021 IBC Section 2510.6 and 2021 IRC Section R703.7.3 installation must be as follows:

- For dry climate zones (B) in accordance with 2021 IBC Section 2510.6.1 or 2021 IRC Section R703.7.3.1, the ALTA HP and ALTA Commercial must be applied in accordance with 2021 IBC Section 2510.6.1 Item 1 and 2021 IRC Section R703.3.1, Item 1, respectively.
- For moist climate zones (A) or marina climate zones (C) in accordance with 2021 IBC Section 2510.6.2 or 2021 IRC Section R703.7.2, ALTA HP and ALTA Commercial must be applied in Section 2510.6.2 Item 1 or 2021 IRC Section R703.7.3.2 Item 1, as applicable.

When use of ALTA LP and Barricade® Drainage is over wood-based sheathing in exterior plaster applications under the 2021 IBC Section 2510.6 and 2021 IRC Section R703.7.3 installation must be as follows:

- For dry climate zones (B) in accordance with 2021 IBC Section 2510.6.1 or 2021 IRC Section R703.7.3.1, the ALTA LP and Barricade® Drainage must be applied in accordance with 2021 IBC Section 2510.6.1 Item 2 and 2021 IRC Section R703.3.1, Item 2, respectively.
- For moist climate zones (A) or marina climate zones (C) in accordance with 2021 IBC Section 2510.6.2 or 2021 IRC Section R703.7.2, ALTA LP and Barricade® Drainage must be applied in Section 2510.6.2 Item 1 or 2021 IRC Section R703.7.3.2 Item 1, as applicable.

For cementitious coatings or exterior insulation and finish systems, application of the barrier must be in accordance with the evaluation report on the exterior coating.

4.3 Air Barrier Material:

When used as an air barrier, the materials must be installed in accordance with the report holder's installation instructions and this report.

4.4 Wall Covering Assembly with Drainage: The assembly described in this section complies with Section 4.5 of the ICC-ES Acceptance Criteria for EIFS Clad Drainage Wall Assemblies (AC235). The assembly is limited to Type V construction, and may be used in Group R, Division 1 and 3, Occupancies. The system consists of minimum 7/16-inch-thick (11.1 mm) Exterior or Exposure 1 plywood or Exposure 1 oriented strand board applied to wood studs spaced a maximum of 16 inches (406 mm) on center and fastened in accordance with the requirements of Chapter 23 of the IBC or Chapter 6 of the IRC. Vertical board edges must butt over studs. The water-resistive barriers must be applied as described in Section 4.2. For EIFS, minimum 1-inch-thick (25.4 mm) flat Type I expanded polystyrene (EPS) foam plastic boards, subject of a current ICC-ES

evaluation report as complying with ASTM C578, are placed over the ALTA[®] HP, ALTA[®] Commercial, or ALTA[®]LP or Barricade[®] Drainage, which are fastened to the sheathing. The EPS boards are fastened through the sheathing with wood screws sized to meet wind resistance requirements, with minimum 2-inch-diameter (51 mm) plates or washers and penetrating a minimum of 1/4-inch through the sheathing. The fastener spacing must not exceed 12 inches (305 mm). Weep screeds, as set forth in IBC 2512.1.2 or 2021, 2018 and 2015 IRC Section R703.7.2.1 (2012, 2009 and 2006 IRC Section R703.6.2.1), must be installed. The EIFS base coat, reinforcing mesh and finish coat must be installed over the EPS in accordance with the EIFS manufacturer's ICC-ES evaluation report.

5.0 CONDITIONS OF USE:

The products described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The products must be installed in accordance with the report holder's published installation instructions, the requirements of the applicable code and this report. In the event of a conflict between this report and the published installation instructions, this report governs.
- 5.2 The products must be covered by an exterior wall finish complying with the requirements of the applicable code.
- 5.3 This report is based on air leakage rates for the products as an air barrier material only. The design and evaluation of the air barrier assembly, of which the products are a component, is outside the scope of this report.
- 5.4 For installation on exterior walls on buildings of Type I, II, III and IV construction under the 2021, 2018 and 2015 IBC, use is limited to buildings that are maximum 40 feet (12.2 m) in height above grade plane, except as permitted under Exception 1 of 2021 and 2018 Section 1402.5 and 2015 IBC Section 1403.5.
- 5.5 For installation on exterior walls on buildings of Type I, II, III and IV construction under the 2012 IBC, use is limited to buildings that are maximum 40 feet (12.2 m) in height above grade plane.
- 5.6 The products are manufactured under a quality control program with inspections by ICC-ES.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the [ICC-ES Acceptance Criteria for Water-resistive Barriers \(AC38\)](#), dated August 2016 (editorially revised July 2021).
- 6.2 Report of flame spread characteristics testing in accordance with ASTM E84 Smoke developed / flame spread
- 6.3 Reports of air leakage testing in accordance with ASTM E2178 Air permeance rate
- 6.4 Report of drainage testing in accordance with ASTM E2273 Drainage efficiency
- 6.5 Report of testing in accordance with ASTM E1354. Response to radiant heat

7.0 IDENTIFICATION

- 7.1 The products described in this report are identified by a label on the container of each roll of membrane, and by printing on the product that includes the report holder's name, address, and telephone number; the product name; and the evaluation report number (ESR-1108).
- 7.2 The report holder's contact information is the following:

ANCI, INC.
600 TOWNPARK LANE, SUITE 075
KENNESAW, GEORGIA 30144
(404) 891-1300
www.anciglobal.com
ALTA360@anciglobal.com

DIVISION: 07 00 00—THERMAL AND MOISTURE PROTECTION

Section: 07 25 00—Water-resistive Barriers/Weather Barriers

Section: 07 27 00—Air Barriers

REPORT HOLDER:

ANCI, INC.

EVALUATION SUBJECT:

ALTA® HP, ALTA® Commercial, ALTA® LP and Barricade® Drainage

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that ALTA® HP, ALTA® Commercial, Baricade Drainage and ALTA® LP, described in ICC-ES evaluation report ESR-1108, has also been evaluated for compliance with the code(s) noted below.

Applicable code edition(s):

- 2019 California Building Code® (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

- 2019 California Residential Code® (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The ALTA® HP, ALTA® Commercial, Barricade Drainage and ALTA® LP products, described in Sections 2.0 through 7.0 of the evaluation report ESR-1108, complies with CBC Chapter 14, provided the design and installation are in accordance with the 2018 *International Building Code*® (IBC) provisions noted in the evaluation report and applicable provisions in the CBC.

2.1.1 OSHPD:

The applicable OSHPD Sections of the CBC are beyond the scope of this supplement.

2.1.2 DSA:

The applicable DSA Sections of the CBC are beyond the scope of this supplement.

2.2 CRC:

The ALTA® HP, ALTA® Commercial, Baricade Drainage and ALTA® LP products, described in Sections 2.0 through 7.0 of the evaluation report ESR-1108, complies with CRC Chapter 7, provided the design and installation are in accordance with the 2018 *International Residential Code*® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued December 2023.